

**AUTOMATIC ROBOT DEPALLETER LOWER ENTRY. MAXIMUM PRODUCTION 4 CYCLES PAR MINUTE. MODEL RPP - DC.**

**PRODUCTS: BOXES, PLASTIC CRATES...**



## **WORKING**

The depalletizer robot receives the pallets on the lower level. The entire layer is taken by the robot and is depalletized. A conveyor system separates and disposes the plastic crates in single file at the exit.

## **TECHNICAL SPECIFICATIONS**


Very robust design. All mechanical, pneumatic, electrical and electronic are high quality, standards and available on the market. Brand of the robot FANUC or similar.

## **OPTIONS DISPONIBLES**

Modem intervention service remotely. Automatic empty pallets stocker.

Example of configuration : pallets 1000 x 1200 mm.

Other configurations possibles.

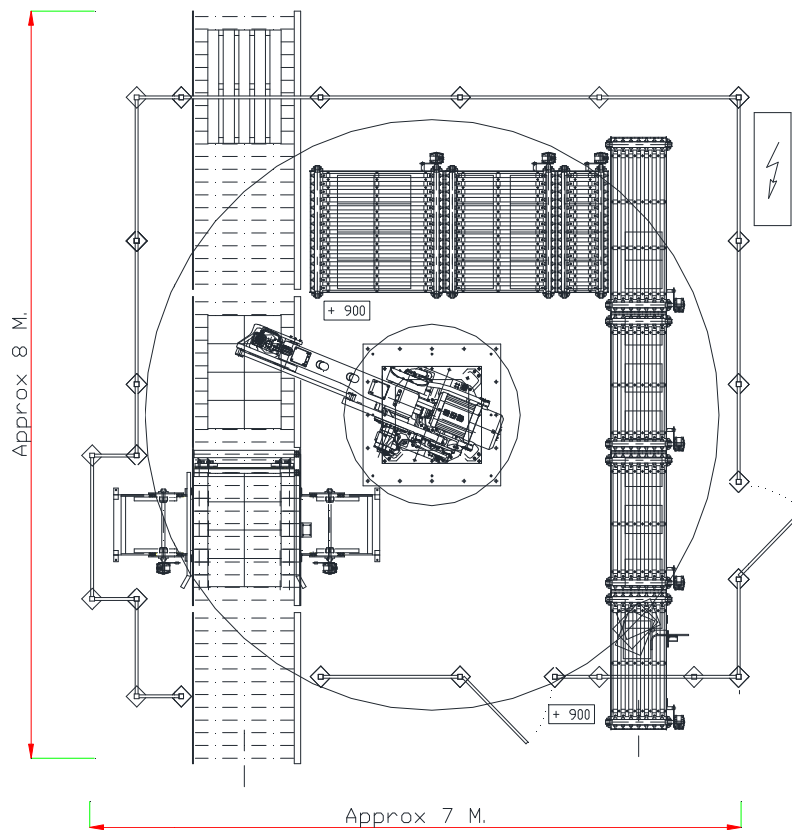

Voltage	220 V or 380 V
Installed Electric Power	8 KW
Air consumption	30 L per cycle
Air pressure	6 atm.
Maximum production	4 layers per minute

